



# GOLDEN VIEW DISPLAY GVDCM0802A

## ◆OUTLINE DIMENSION

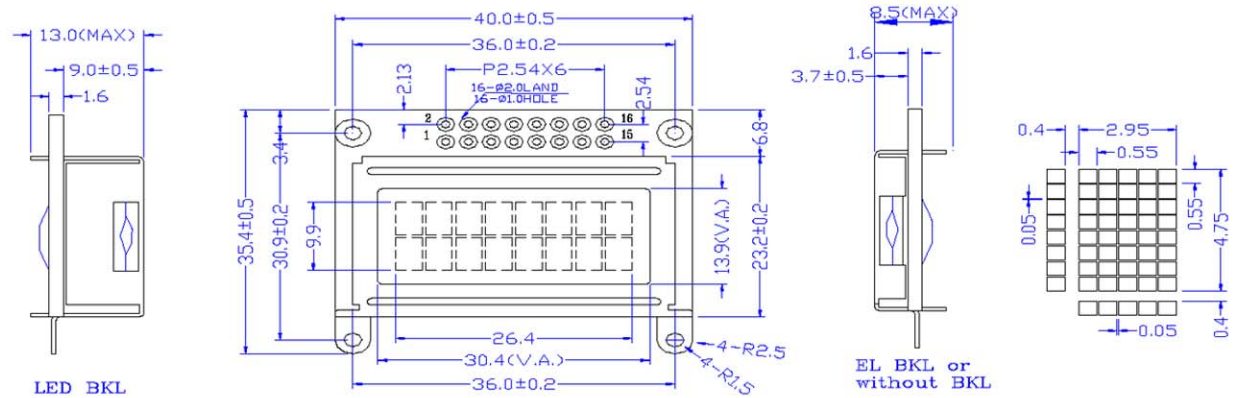

## ◆BLOCK DIAGRAM & POWER SUPPLY

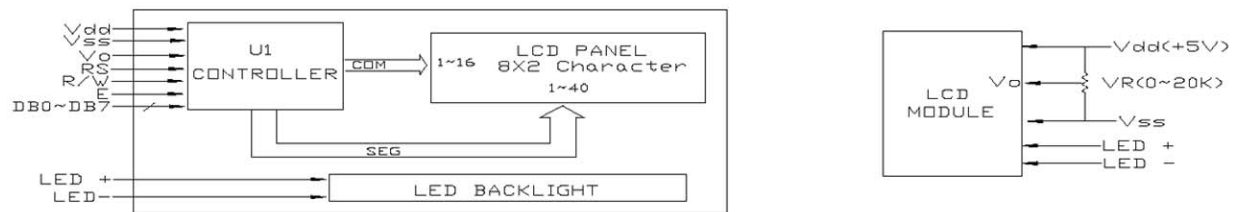

## ◆MECHANICAL SPEC. & FEATURES

Item	Dimension(mm)	Features	
Module Size(W×H×T)	58.0×32.0×9.5/13.5	LC Fluid	TN,STN (Yellow-green, Gray, Blue),FSTN
Viewing Area(W×H)	38.0×16.0	Polarizer	Reflective,Transflective,Transmissive
Dot Size(W×H)	0.55×0.55	View Angle	6:00 o'clock or 12:00 o'clock
Dot Pitch(W×H)	0.60×0.60	Display Type	Positive or Negative
Character Size(W×H)	2.95×4.75	Backlight	LED (Optional)
Character Pitch(W×H)	3.35×5.15	Operating Temp.	0°C~50°C or -20°C~70°C
		Controller	ST7066U or Equivalent

## ◆INTERFACE PIN CONNECTIONS

Pin No.	Symbol	Function	Pin No.	Symbol	Function
1	Vss	Ground for logic	6	E	Enable signal
2	Vdd	Power supply for logic	7~14	DB0~DB7	Data bus lines
3	V0	Power supply for LCD	15	A	BKL +
4	RS	Register selection(H:Data,L:Instruction)	16	K	BKL -
5	R/W	Read/Write selection(H: R, L: W)			

## ◆ELECTRICAL CHARACTERISTICS

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating Voltage	Vdd	Ta=25°C	---	5.0	---	V
Operating Voltage for LCD	Vlcd	Ta=25°C	---	4.5	---	V
Supply Current	Idd	Ta=25°C, Vdd=5.0V	---	2.0	3.0	mA
Supply Voltage for LED	Vf	Ta=25°C, R=0Ω	---	4.2	4.5	V
Supply Current for LED	If	Ta=25°C, Vf=4.2V	---	---	---	mA